

## SGM MAGNETICS Enquiry form



## Horizontal eye coils

## **General Information:**

Company name

Person to contact							
Position							
E-mail address							
Phone no.				Fax no.			
Address							
Your SGM Contact	Name:	Name:			Email		
Phone r		0.		Fax no.			
Ooil specifications:		<del></del>					
Inner diameter		Min.	mm/inches		Max.	mm/inches	
Outer diameter		Min.	mm/inches		Max.	mm/inches	
Width		Min.	mm/inches	mm/inches		mm/inches	
Weight		Min.	Metric tons/US tons		Max.	Metric tons/US tons	
Smallest coil OD presenting the maximum weight			mm/inches				
Steel gauge		Min. mm/inches		Max.	mm/inches		
Are coils zinc coated?		□ No		☐ Yes, thickness micron			
Temperature		☐ Ambient			☐ Hot (>150 °C / 300 °F)		
For hot coils only							
Standard surface temperature	erature	°C/°F					
Maximum surface temp	erature	°C/°F					
Standard time per mag	net lifting cyc	le s	econds				
Standard quantity of lift	s per hour						
Maximum lifts per hour							

☐ Yes, every

time for

time


Are there any stops in operation? ☐ No







## **Coil wrapping specifications:**

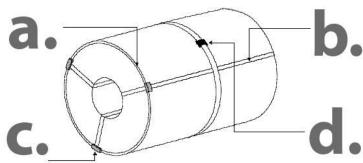

Turns								
	Wrapping: Turns				mm / inches			
Straps:								
Number of radial straps Number			r of diametric straps		Strap thickness	mm / inches		
Edge protection:								
Width mm / inches			-	Thickness	mm / inches			
Strap closing clips	:							
Thickness mm / inches □ Can			be everywh	nere	☐ Upper part can be avoided			
rane specification Crane capacity	ons: Metric tons/U	S tons						
Crane capacity	Metric tons/U	S tons		1				
Crane rated voltage				□ Vac □ Vdc				
Crane working envir	onment		☐ Indoor ☐ Outdoor					
emarks:								
Preferred solution:	1 1							
□ Electro-magnet □ B				ery back-up requested				
☐ Electro-permane	nt magnet							
☐ No preference								
Process stage:								
☐ Hot rolled	☐ Cold rolle	☐ Cold rolled		ng bay	☐ Else, please specify			
otes:								
01001								