

SGM MAGNETICS

Enquiry form



Pipes

General Information:


Company name		
Person to contact		
Position		
E-mail address		
Phone no.		Fax no.
Address		
Your SGM Contact	Name:	Email
	Phone no.	Fax no.

Pipe specifications:

Length	Min.	mm/inches	Max.	mm/inches
Outside diameter (OD)	Min.	mm /inches	Max.	mm/inches
Wall thickness (WT)	Min.	mm /inches	Max.	mm/inches
Minimum possible WT that the largest pipe OD may present	Min.	kg/lbs		
Maximum possible WT that the largest pipe OD may present	Max.	kg/lbs		
Lifting mode	<input type="checkbox"/> Single pipe		<input type="checkbox"/> Layer of pipes	
Pipe layer composition	Qty.		per OD	mm/inches
	Qty.		per OD	mm/inches
	Qty.		per OD	mm/inches
The pipes are:				
<input type="checkbox"/> Seamless				
<input type="checkbox"/> Spiral welded, thickness mm/inches				
<input type="checkbox"/> Longitudinal weld, thickness mm/inches				
Temperature	<input type="checkbox"/> Ambient		<input type="checkbox"/> Hot (>150°C/300°F)	
For hot pipes only				
Standard surface temperature	°C/°F			
Maximum surface temperature	°C/°F			

Crane specifications:


Crane rated voltage	<input type="checkbox"/> Vac <input type="checkbox"/> Vdc	
Crane working environment	<input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor	
Crane type and capacity		
<input type="checkbox"/> Single hoist	<input type="checkbox"/> Two hoists (set distance)	<input type="checkbox"/> Two independent hoists



SGM

SGM MAGNETICS

Enquiry form

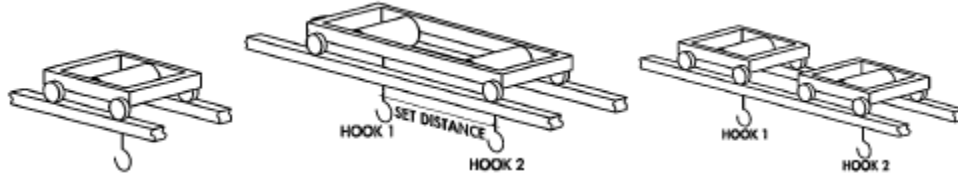

Capacity	Metric tons	Capacity 1	Metric tons	Capacity 1	Metric tons
		Capacity 2	Metric tons	Capacity 2	Metric tons
		Set distance mm/inches			

Remarks:

Preferred solution:		
<input type="checkbox"/> Electro-magnet	<input type="checkbox"/> Battery back-up requested	
<input type="checkbox"/> Electro-permanent magnet		
<input type="checkbox"/> No preference		
Cable reel:		
<input type="checkbox"/> Not requested	<input type="checkbox"/> Requested, stroke	meters/feet

Notes: