

**SGM**

# SGM MAGNETICS

## Enquiry form





### Re-bars (Reinforced construction bars)

#### General Information:

Company name		
Person to contact		
Position		
E-mail address		
Phone no.		Fax no.
Address		
Your SGM Contact	Name:	Email
	Phone no.	Fax no.

#### Specifications:

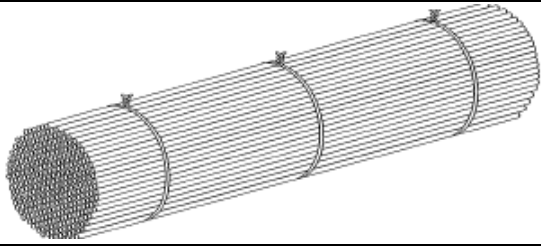Re-bar section:	Min.	mm/inches	Max.	mm/inches
Bundle length	Min.	mm/inches	Max.	mm/inches
Bundle weight	Min.	kg/lbs.	Max.	kg/lbs.
Minimum possible bar section of longest bundle:			mm/inches	
Maximum weight of the shortest bundle:			kg/lbs.	
Minimum length of the heaviest bundle:			mm/inches	
Max. quantity of bundles to be lifted at a time:				
Max. width of multiple layers mm/inches				
<b>Banding</b>				
Quantity of straps:	every m/ft (distance)			
Tightness	<input type="checkbox"/> Tight <input type="checkbox"/> Loose and adjustable <input type="checkbox"/> Loose and non adjustable			




# SGM MAGNETICS

## Enquiry form



### Crane specifications:

Crane rated voltage	<input type="checkbox"/> Vac <input type="checkbox"/> Vdc	
Crane working environment	<input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor	
<b>Crane type and capacity</b>		
<input type="checkbox"/> Single hoist	<input type="checkbox"/> Two hoists (set distance)	<input type="checkbox"/> Two independent hoists

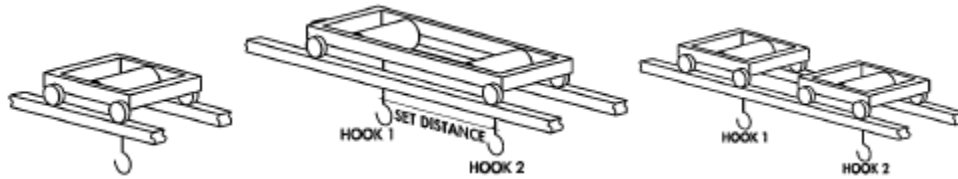

Capacity	Metric tons	Capacity 1	Metric tons	Capacity 1	Metric tons
		Capacity 2	Metric tons	Capacity 2	Metric tons
		Set distance			
		mm/inches			

### Remarks:

<input type="checkbox"/> Battery back-up requested		
<b>Cable reel:</b>		
<input type="checkbox"/> Not requested	<input type="checkbox"/> Requested, stroke	meters/feet

### Notes: