

SGM MAGNETICS

Enquiry form



Slab & blooms

General Information:


Company name		
Person to contact		
Position		
E-mail address		
Phone no.		Fax no.
Address		
Your SGM Contact	Name:	Email
	Phone no.	Fax no.

Application:

<input type="checkbox"/> Hot mill (caster exit bed)	<input type="checkbox"/> Storage area
<input type="checkbox"/> Port	<input type="checkbox"/> Other, please specify:

Slab/bloom specifications:

Length	Min.	mm/inches	Max.	mm/inches
Width	Min.	mm/inches	Max.	mm/inches
Thickness	Min.	mm/inches	Max.	mm/inches
Weight	Min.	kg/lbs.	Max.	kg/lbs.
Temperature	<input type="checkbox"/> Ambient		<input type="checkbox"/> Hot (>150°C/300°F)	
For hot slabs & blooms only				
Standard surface temperature	°C/°F			
Maximum surface temperature	°C/°F			
Standard time per magnet lifting cycle	seconds			
Magnet operating time	hours/day	for days/week		
Slab caster capacity per hour (8 hours)	Metric tons/US tons			




SGM MAGNETICS

Enquiry form



Crane specifications:

Crane rated voltage	<input type="checkbox"/> Vac <input type="checkbox"/> Vdc	
Crane working environment	<input type="checkbox"/> Indoor <input type="checkbox"/> Outdoor	
Crane type and capacity		
<input type="checkbox"/> Single hoist	<input type="checkbox"/> Two hoists (set distance)	<input type="checkbox"/> Two independent hoists

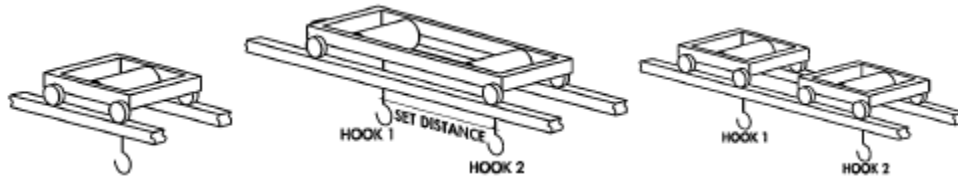

Capacity	Metric tons	Capacity 1	Metric tons	Capacity 1	Metric tons
		Capacity 2	Metric tons	Capacity 2	Metric tons
		Set distance	mm/inches		

Lifting area environment:

<input type="checkbox"/> Slab yard
<input type="checkbox"/> Truck or railcar loading
<input type="checkbox"/> Vessel loading
<input type="checkbox"/> Else, please specify

Remarks:

Preferred solution:		
<input type="checkbox"/> Electro-magnet	<input type="checkbox"/> Battery back-up requested	
<input type="checkbox"/> Electro-permanent magnet		
<input type="checkbox"/> No preference		
Cable reel:		
<input type="checkbox"/> Not requested	<input type="checkbox"/> Requested, stroke	meters/feet

Notes: